

Table 1-1 (PP composition)

	Polymer	Vinyl bonding amount (V)	Hydrogenation ratio (H)	Vinyl bond hydrogeneration ratio	Bending elastic modulus Mpa	Izod (-30°C) J/m	Tensile breaking point elongation	Thermal resistant aging property sustaining ratio (%)
Example 1	3	50	65	98	1800	47	80	60
Com. Ex. 2	2	50	40	73	1600	45	60	40
Com. Ex. 4	5	20	50	99	1700	37	40	60
Com. Ex. 6	7	65	60	80	1650	40	50	50

Table 1-2 (PP composition)

	Polymer	Vinyl bonding amount (V)	Hydrogenation ratio (H)	Vinyl bond hydrogeneration ratio	M300% (kg/cm2f)	Haze (%)
Example 6	16	62	75	98	135	6
Com. Ex. 13	17	62	98	100	135	13
Com. Ex. 14	18	65	55	70	140	15

Table 3 (Viscous adhesive composition)

	Polymer	Vinyl bonding amount (V)	Hydrogenation ratio (H)	Vinyl bond hydrogeneration ratio	Adhesive power (gf/10mm)	Retentivity (minute)	Melt viscosity change ratio
Example 7	22	50	60	97	1,580	4.3	-23
Com. Ex. 17	21	50	40	73	1,690	3.5	+42
Com. Ex. 19	25	14	55	94	300	100	-31
Com. Ex. 20	26	85	60	67	760	4.0	+65

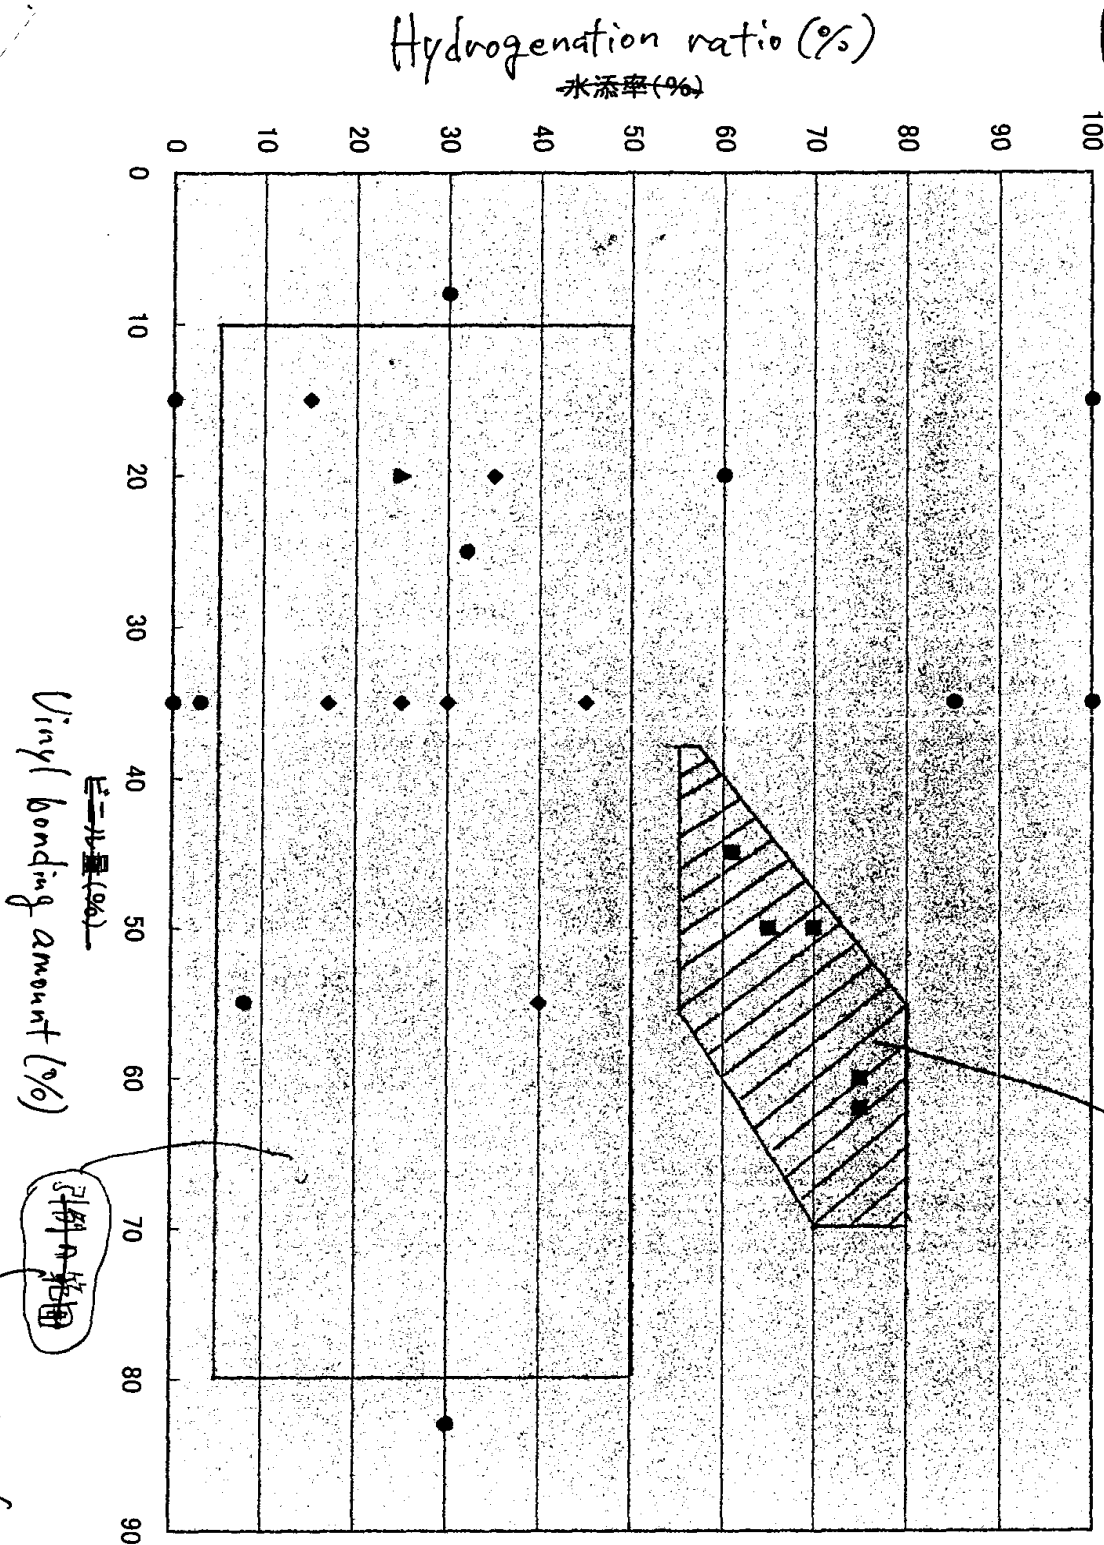


Fig. 1

引例との関係

本願(1-5)

Present Invention  
(Claims 1-5)



Vinyl bonding amount (%)

引例(1-5)

Cited reference


Cited Reference

◆	実施例 → Ex.
●	EP 比較例 → Com. Ex.
▲	EP/PP組成物例 Ex. 18
■	本願実施例

Ex. of Invention

PP composition

Fig. 3

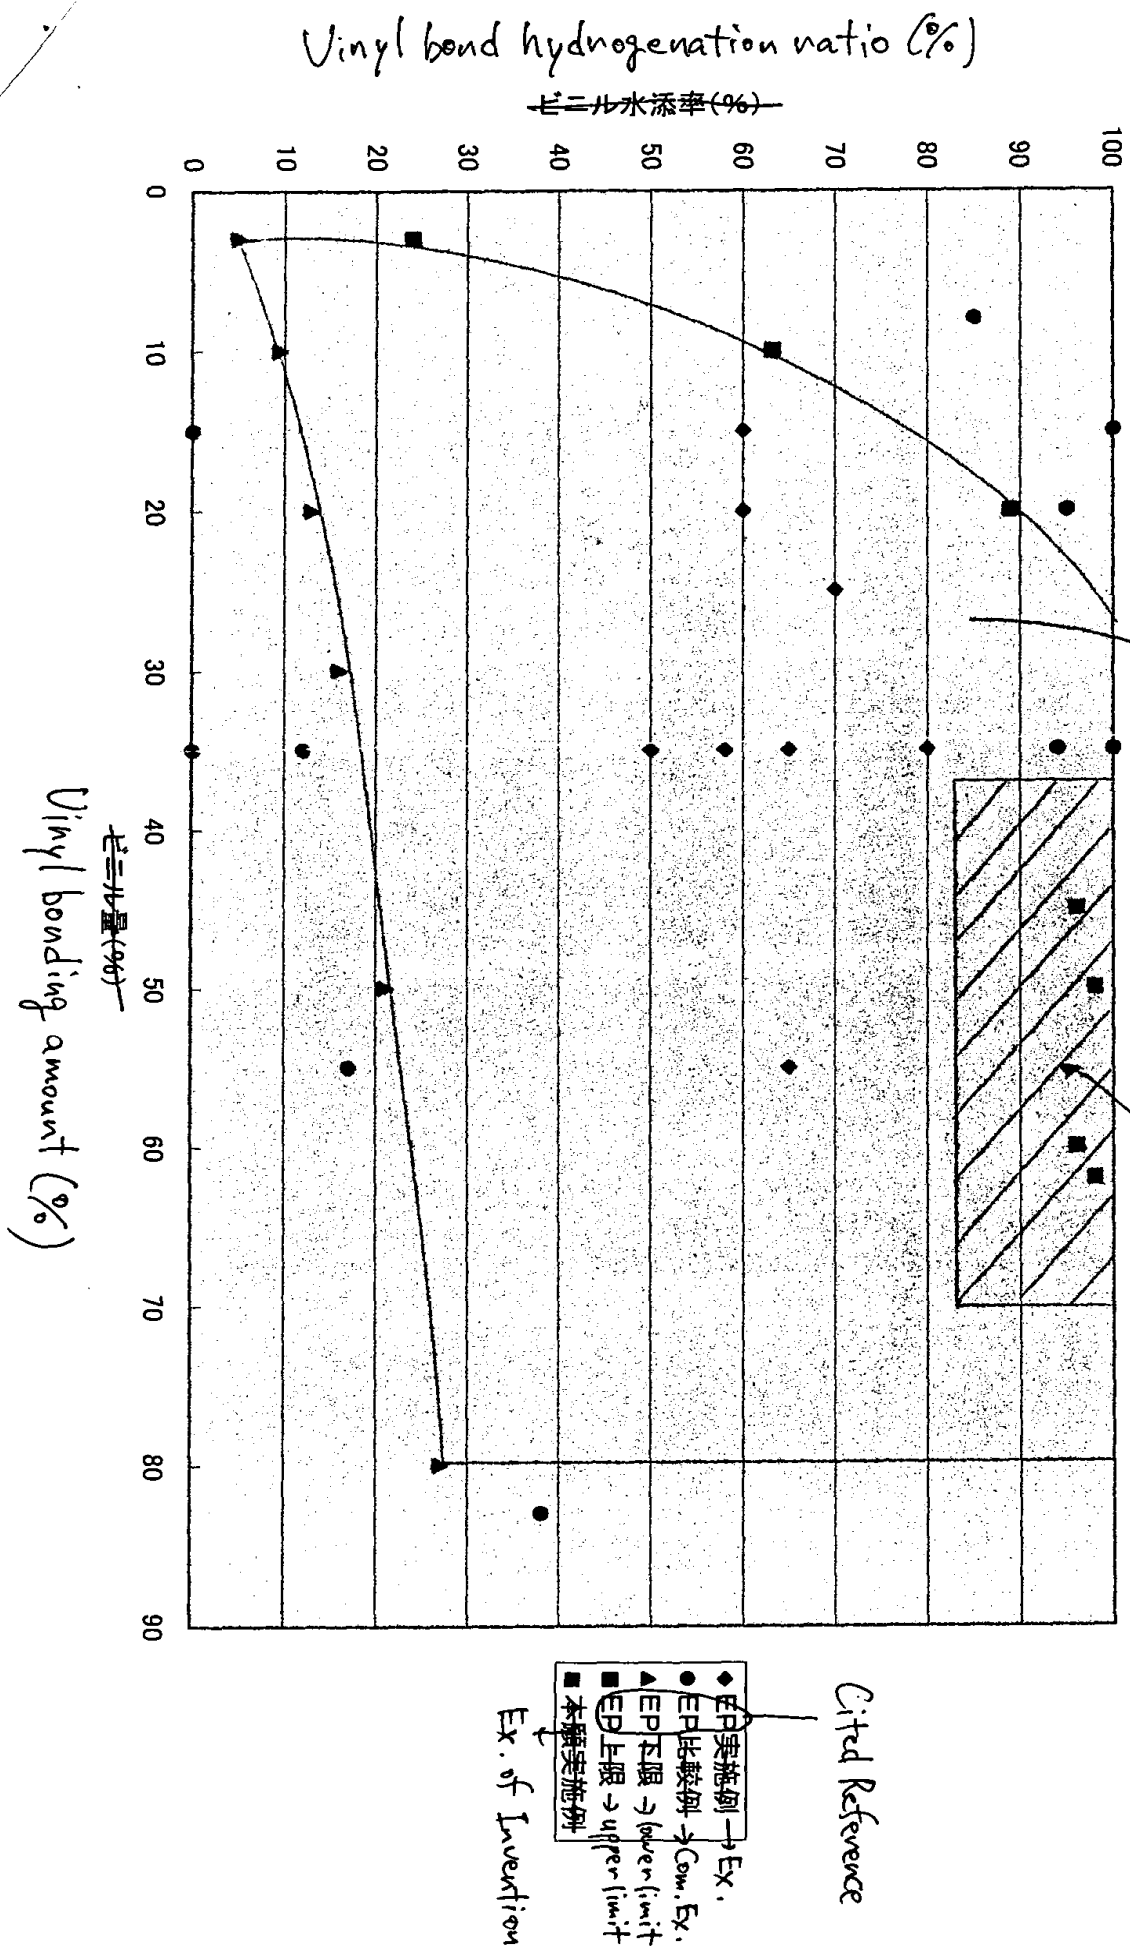

Present Invention  
(Claims 6-8)

